



// ONE BRAND // ONE SOURCE // ONE SYSTEM



// SERVICE // MATERIAL PROCESSING // SURFACE PROTECTION // AUTOMOTIVE

TYRE SEALANT TT SEAL XXL

The preventive tyre sealant for OTR-/EM and agricultural tyres with tread punctures up to 8 mm damage to the casing.



TYRE SEALANT TT SEAL XXL

Benefits

- Expensive downtime to the vehicle is avoided
- Easy application into intact tyres by use of the hand pump
- Repairs inside the tyre are not adversely affected
- Effective for the whole lifetime of the tyre
- Tyres filled with TT SEAL XXL continue to be fully retreadable and repairable
- Reduces the risk of slinking deflation

A preventive measure

- The preventive viscous tyre sealant TT SEAL XXL is preventively filled into the intact tyres, through the inflation valves, using a hand pump
- During wheel rotation, the TT SEAL XXL flows over the tread inside the tyre, while ready to immediately seal an up-to-8 mm injury to the casing
- TT SEAL XXL contains microfibrils. As soon as a puncture occurs, the tyre inflation pressure squeezes them automatically into the injury
- The liquid ingredients of TT SEAL XXL come out as drops on the tyre outside, where they dry
- The microfibrils durably seal the puncture channel, while staying elastic enough to easily withstand any tyre flexing strain
- TT SEAL XXL is approved for a speed of up to 40 km/h



593 1252 TT SEAL XXL 20 l PE-barrel



593 1277 TT SEAL XXL hand pump



593 1284 Valve adapter

Reference Numbers and Description


- 593 1252 TT SEAL XXL 20 l PE-barrel
- 593 1260 TT SEAL XXL 60 l PE-barrel

Recommended accessories

- 593 1277 TT SEAL XXL hand pump capacity 100 ml per stroke (suitable for 20 l and 60 l PE-barrel)
- 593 1284 Valve adapter, from hand pump hose to valve (including reducer from VG12 to VG8)



REMA TIP TOP AG
Gruber Strasse 65 · 85586 Poing / Germany
Phone: +49 8121 707-0
Fax: +49 8121 707-10 222
info@tiptop.de
www.rema-tiptop.com

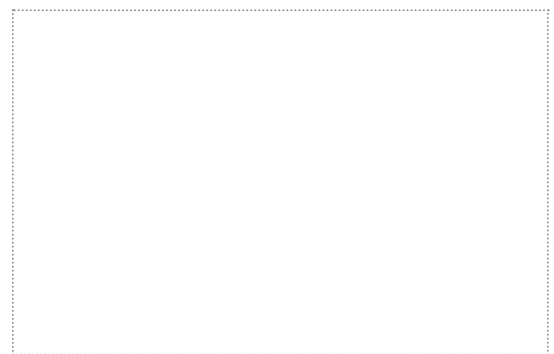

Your local contact